

PRODUCT:	Falcon Setup Wizard
ITEM CODE:	

Introduction

This Guide has been created to aid in the Initial configuration of a brand-new viper system.

Requirements

Router – For internet connection


NVR – To be connected and configured for use

Monitor for initial setup.

Network Design


Initial Device Set-Up

1. Plug in your NVR to your Monitor
2. Plug your NVR into your router with a network cable (Direct connection recommended)
3. Plug in the power for the NVR.
4. On power the unit will show the splash screen for 10-30 seconds it should then show the first setup screen. If it does not click and hold the right mouse button until your unit beeps this will force a screen resolution change.
5. Setup your language and location, we are using English for the language and the United Kingdom for the locality

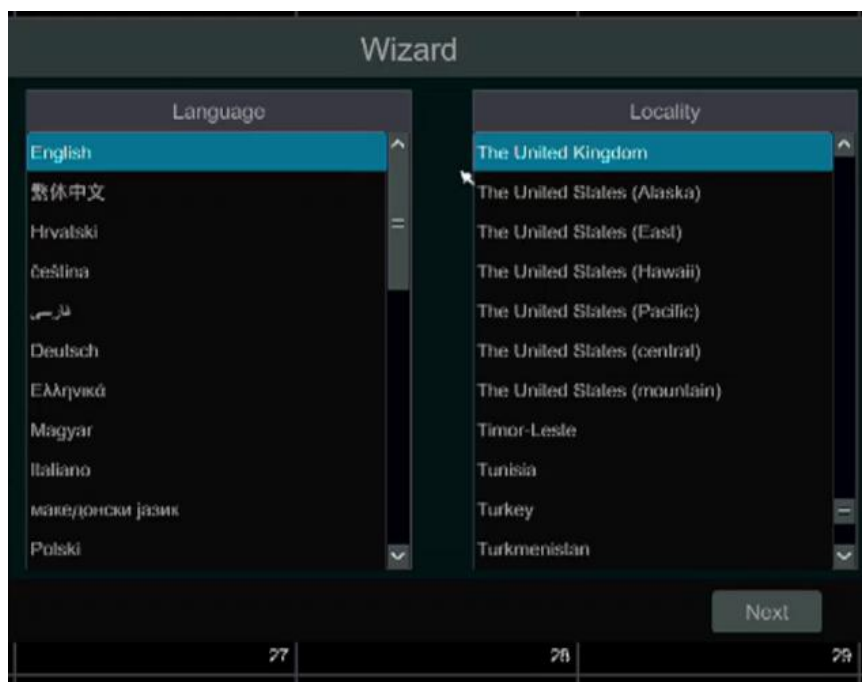


Qvis Lighting & Security Ltd. Telephone: +44 (0)2393 870050	Page 1 of 8 Issued By: Technical Dept
Approved By:	Date:11/03/2024

6. Privacy Statement, to use the recorder you have to accept the agreement as stated by the manufacturer, tick the box to accept and OK to continue.

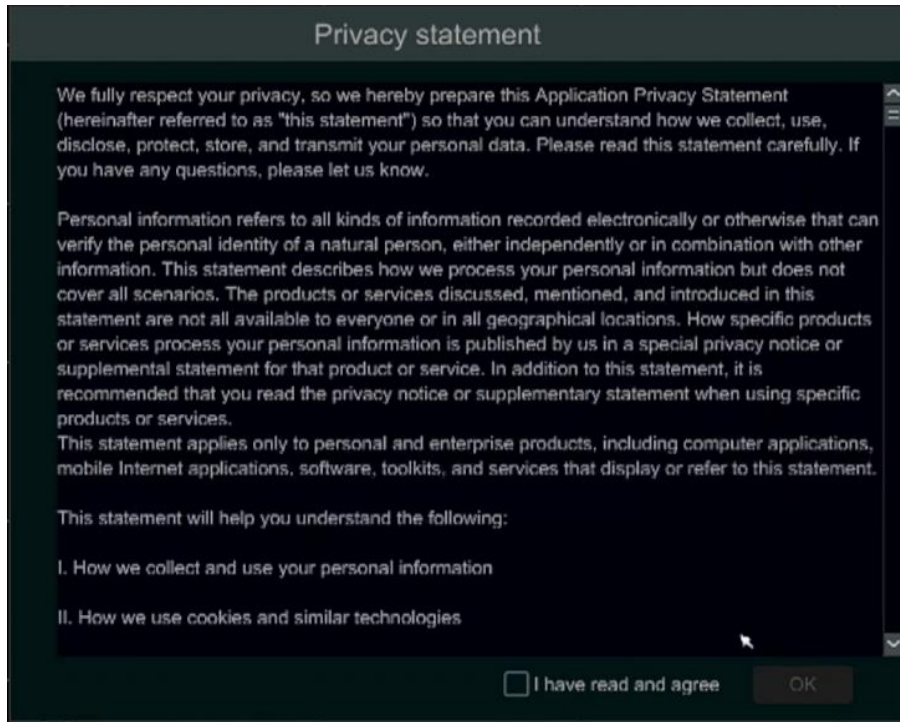


7. Time and Date configuration – It is recommended to use **NTP** and **DST** on the system to ensure correct time on both the recorder and the cameras.

For prosecution most forces require the time and date to be within a 10 minute +/- of the real time

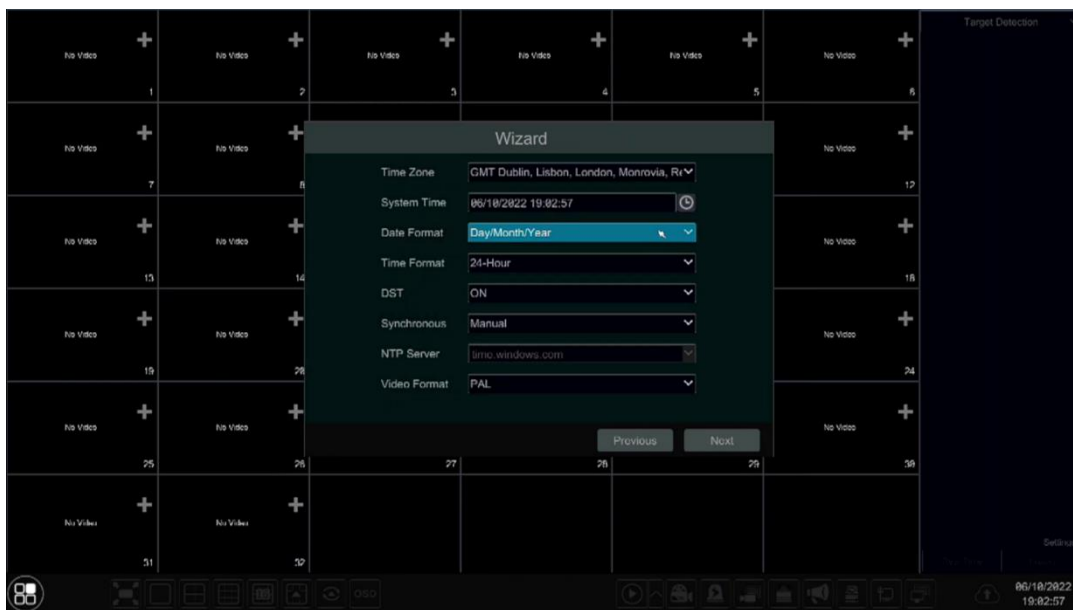


<p>Qvis Lighting & Security Ltd. Telephone: +44 (0)2393 870050</p>	<p>Page 2 of 8 Issued By: Technical Dept</p>
<p>Approved By:</p>	<p>Date:11/03/2024</p>


8. Password – The default for Viper is 123456 it is recommended this be changed on the recorders, especially those connected to the internet.

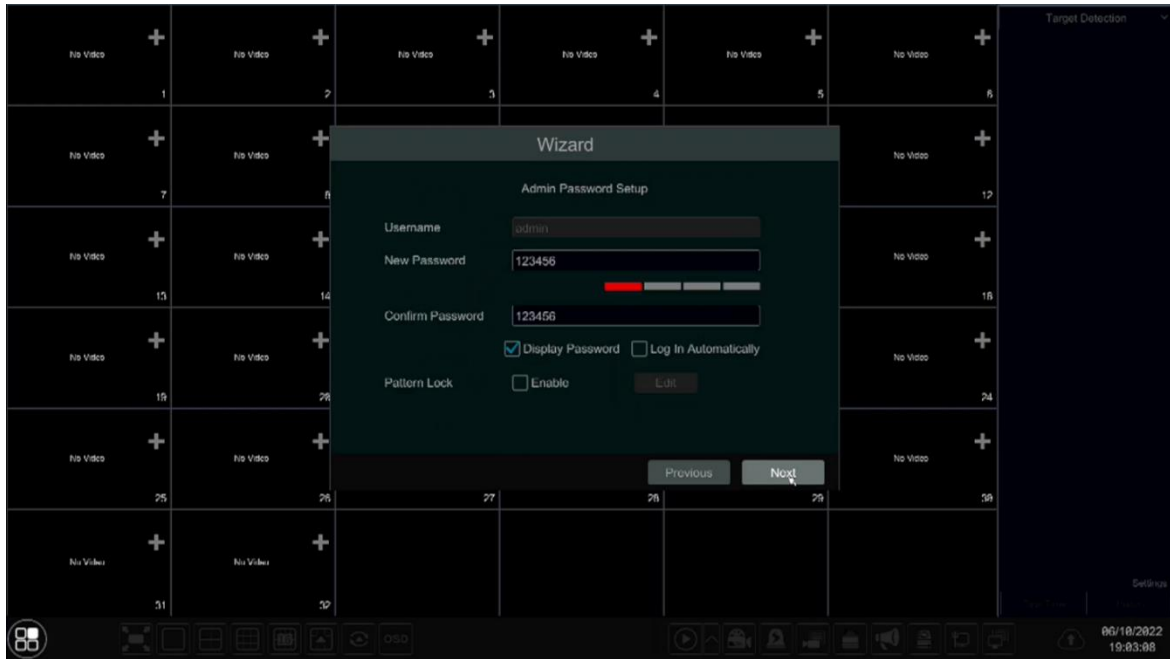


9. Security questions – it is recommended you create and record both the questions and the answer and store this in a secure place, this will allow you to access the recorder and change the admin password if you forget your password.

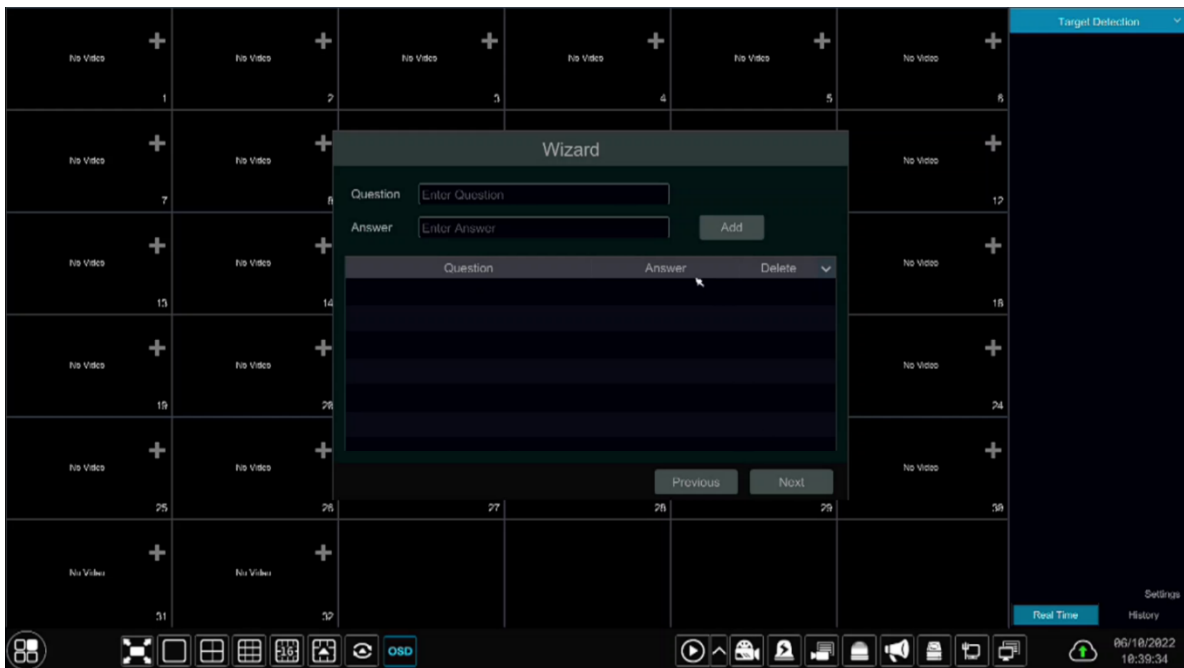


10. Hard Drive – You will need to format your Hard click the Format button, this will wipe the hard drive of any recordings and prepare it for use with the recorder.

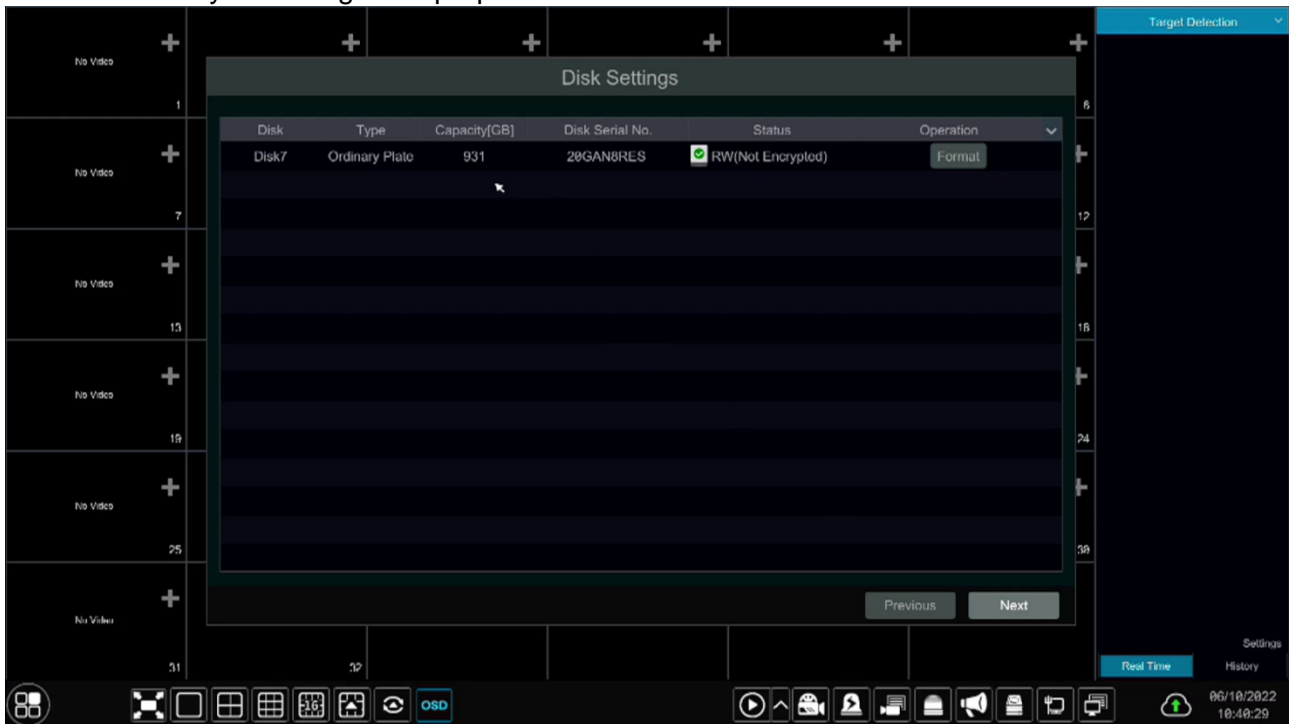


11. As the format is going to wipe the hard drive it will ask for confirmation. Click Confirm Format and click OK

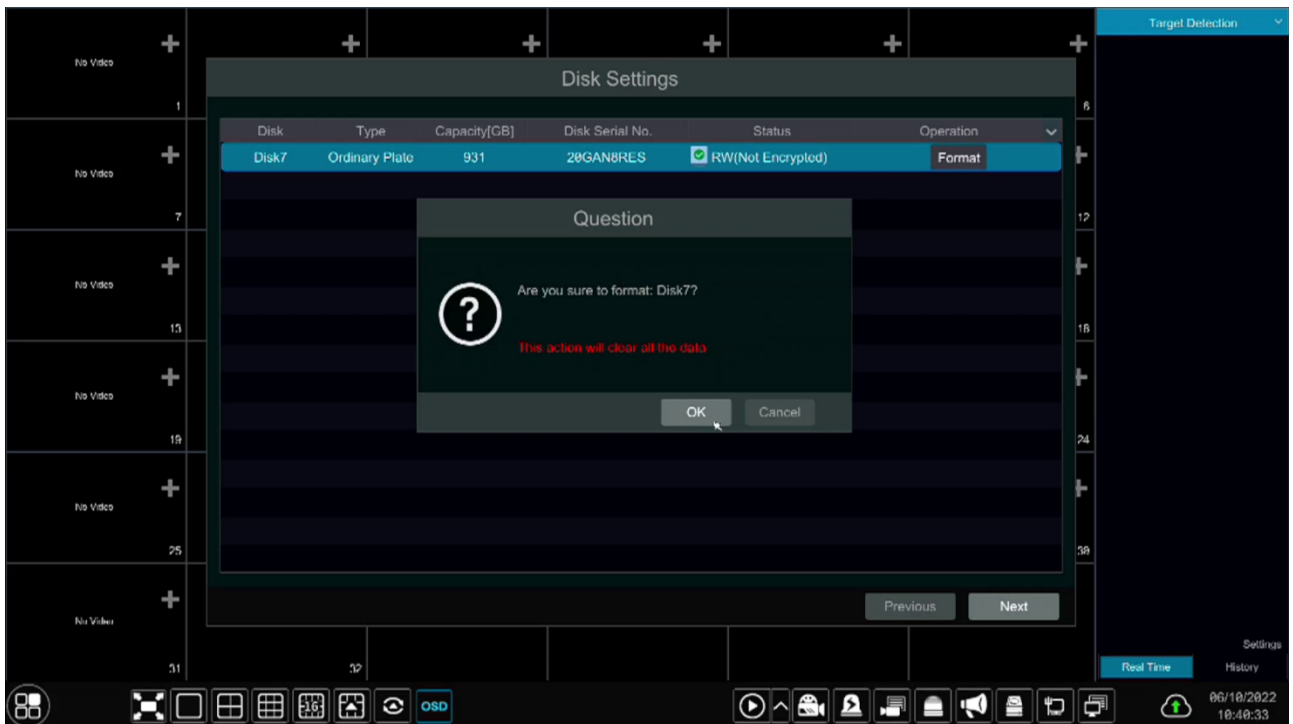


12. The system will now offer the Wizard setup, as we do not want this to load each time untick the enable wizard next time and then click onto the Wizard setup button

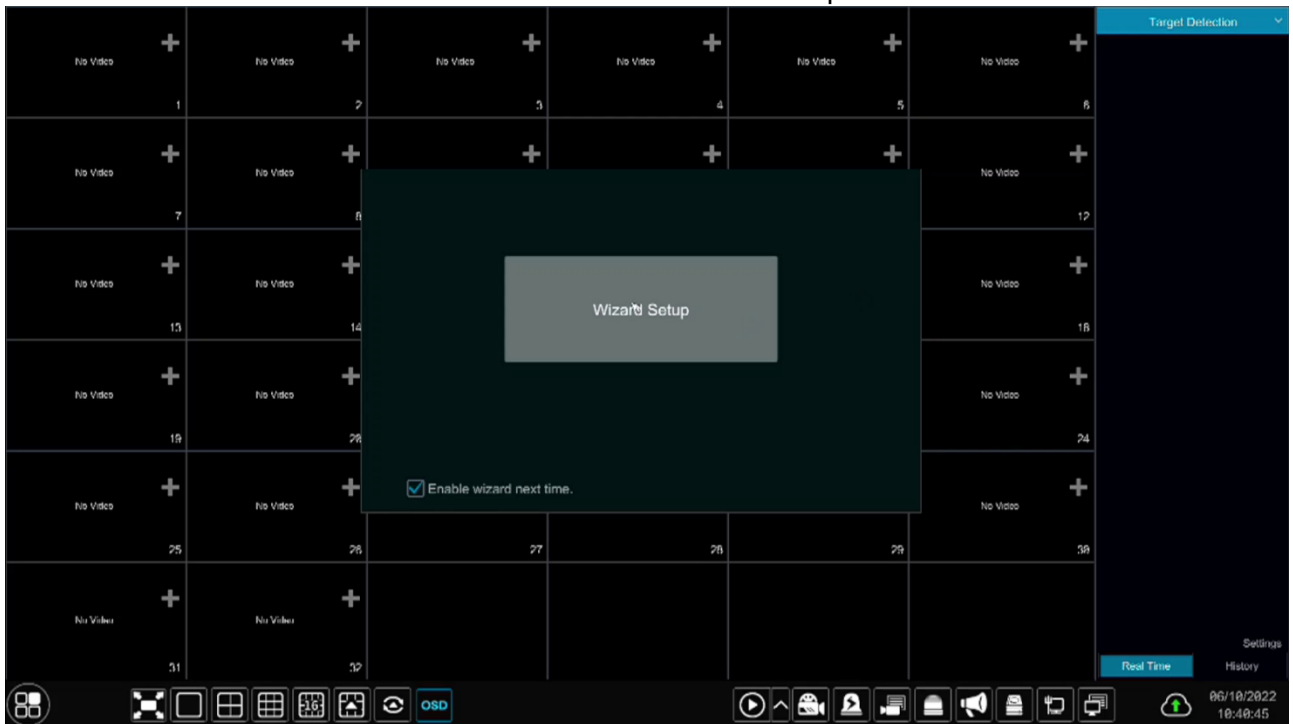


13. IP address setup – This system will use DHCP also known as obtaining an IP address automatically, this uses the router to configure the network settings of the recorder. This setup is used in most installs except in managed networks (normally seen in commercial properties)

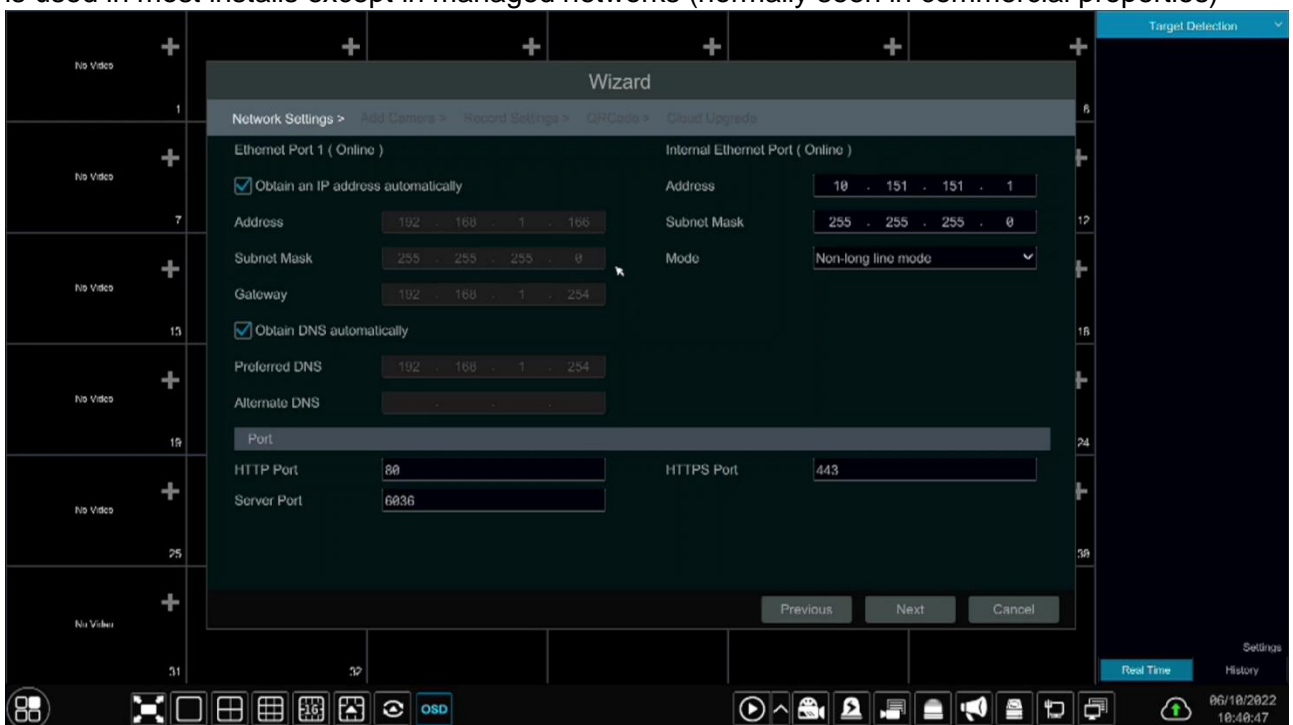


14. Select the cameras if you have any connected to the recorder or the client's network. Be aware cameras that are connected to the rear of the recorder will auto add if they are Viper or Falcon cameras.

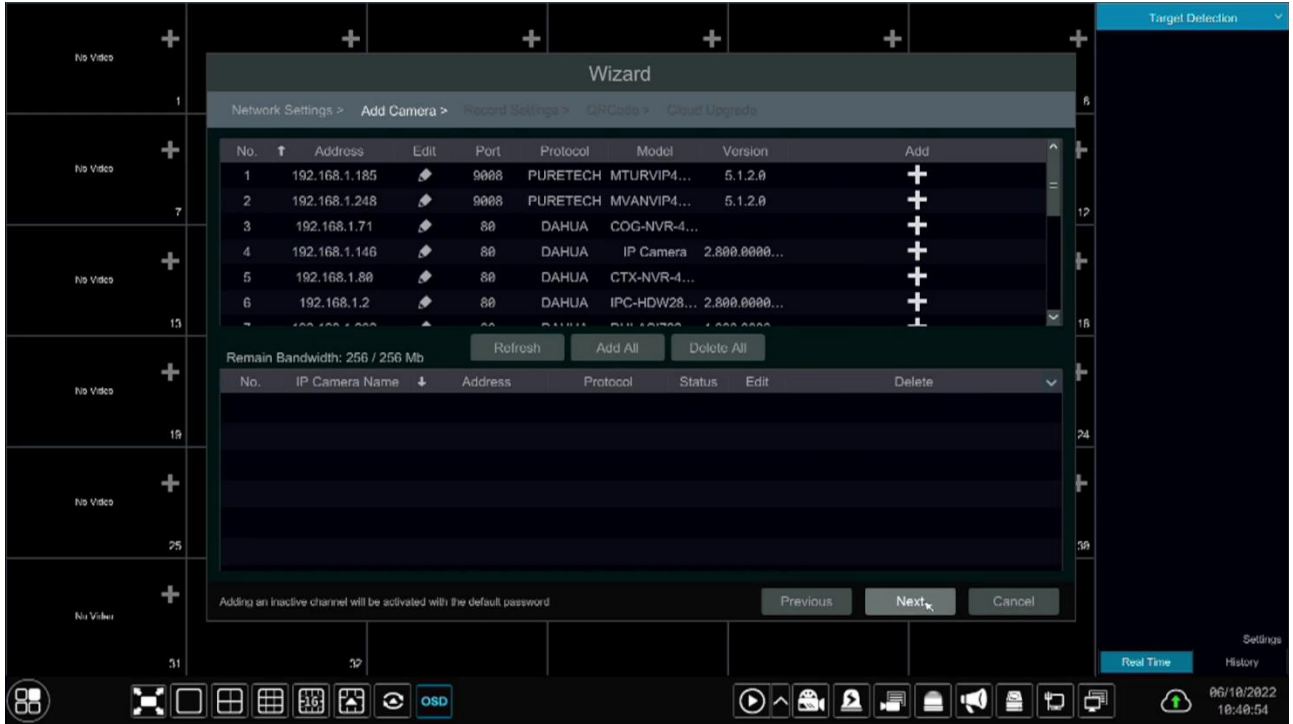

15. Configure the record schedule. The default as highlighted is Always(24x7) Record +Motion Record +Sensor Record +AI Record.

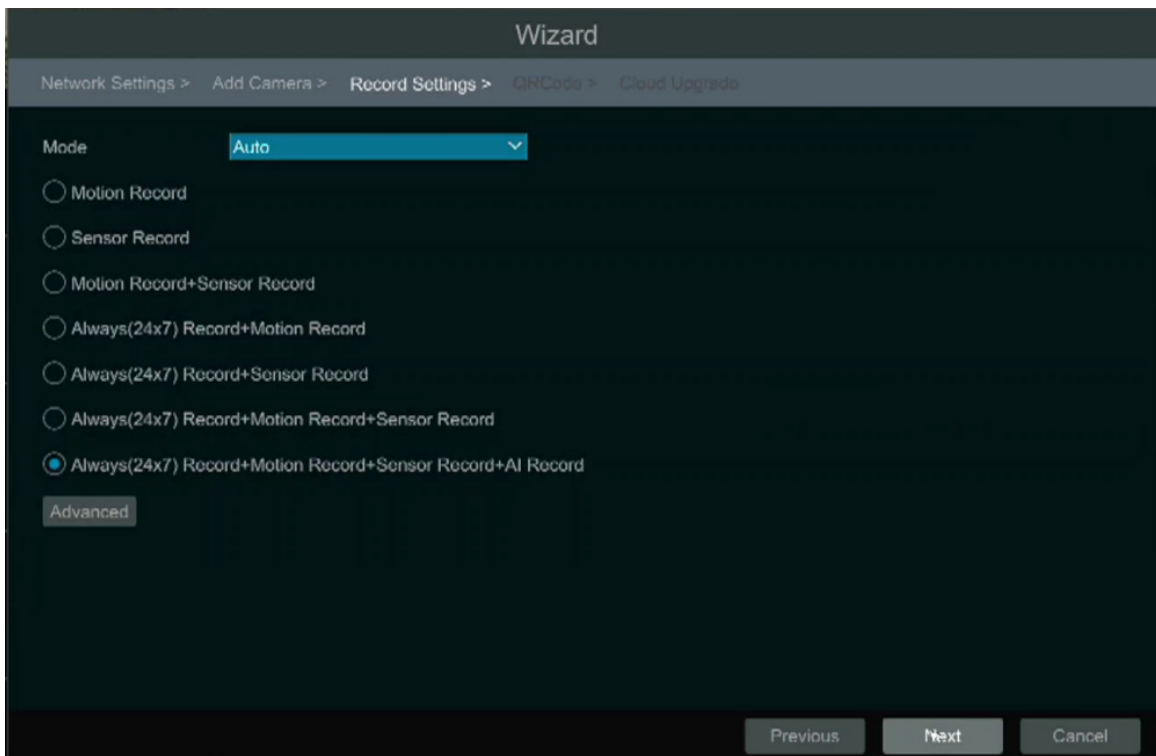


16. App Access configuration – Ensure the box is ticked to enable the cloud access for the recorder. The code shown on screen is used with the Superlive plus app. See Superlive Plus

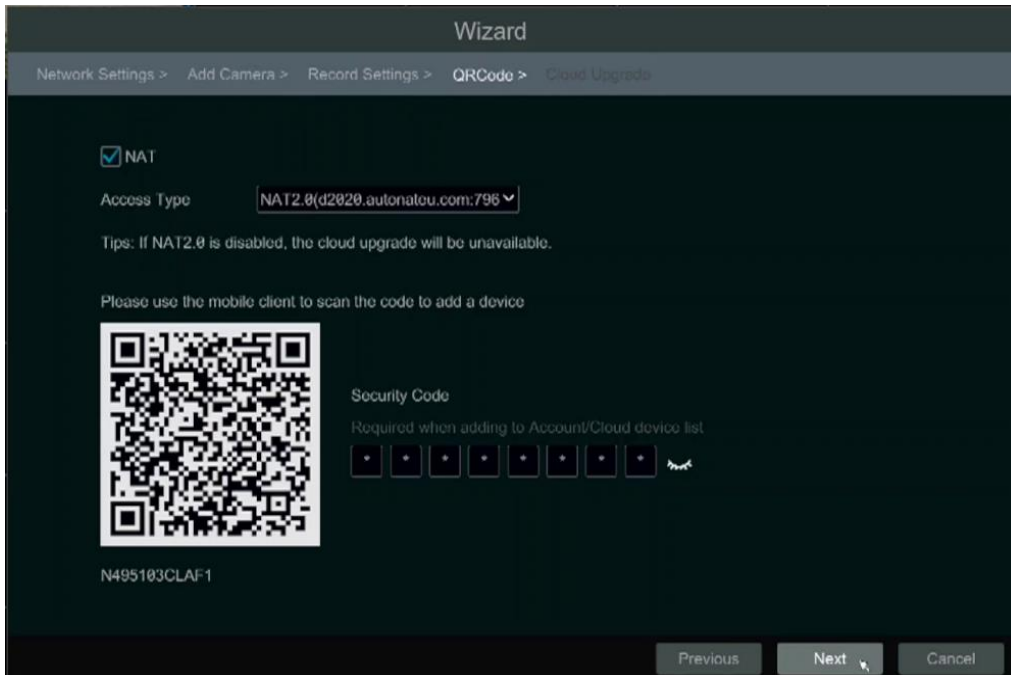


Quick Reference Guide

17. Cloud Upgrade – By default this is disabled, and we recommend you enable this to allow cloud updating of the recorder

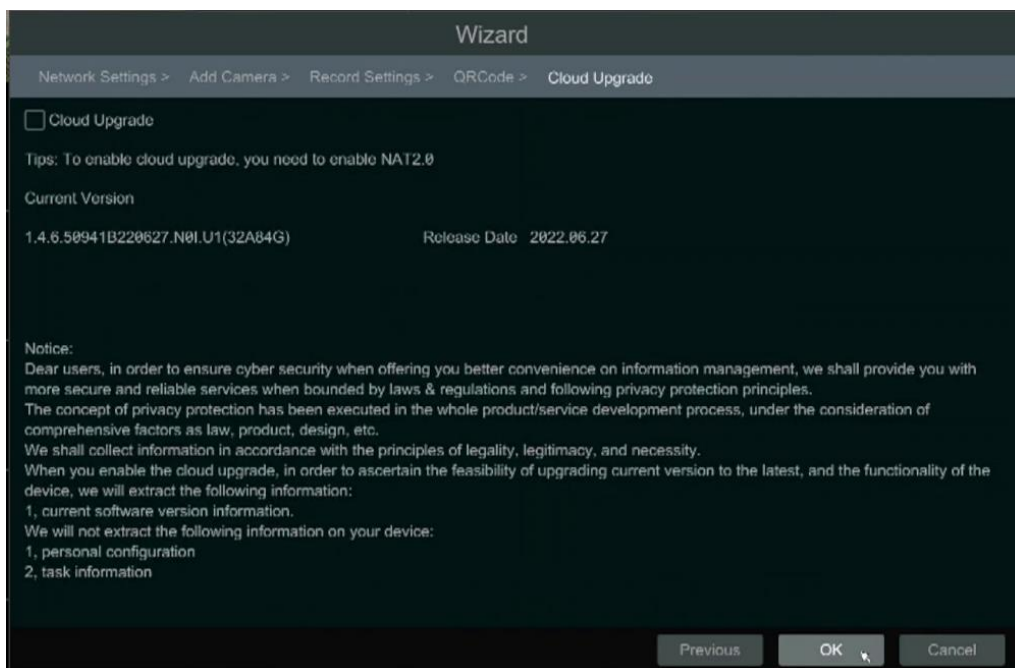

<p>Qvis Lighting & Security Ltd. Telephone: +44 (0)2393 870050</p>	<p>Page 7 of 8 Issued By: Technical Dept</p>
<p>Approved By:</p>	<p>Date:11/03/2024</p>

18. If you left the password as default it will alert on completion of the wizard with the following warning, it is **NOT** recommended to leave the password as default on any machine as this is a security risk.

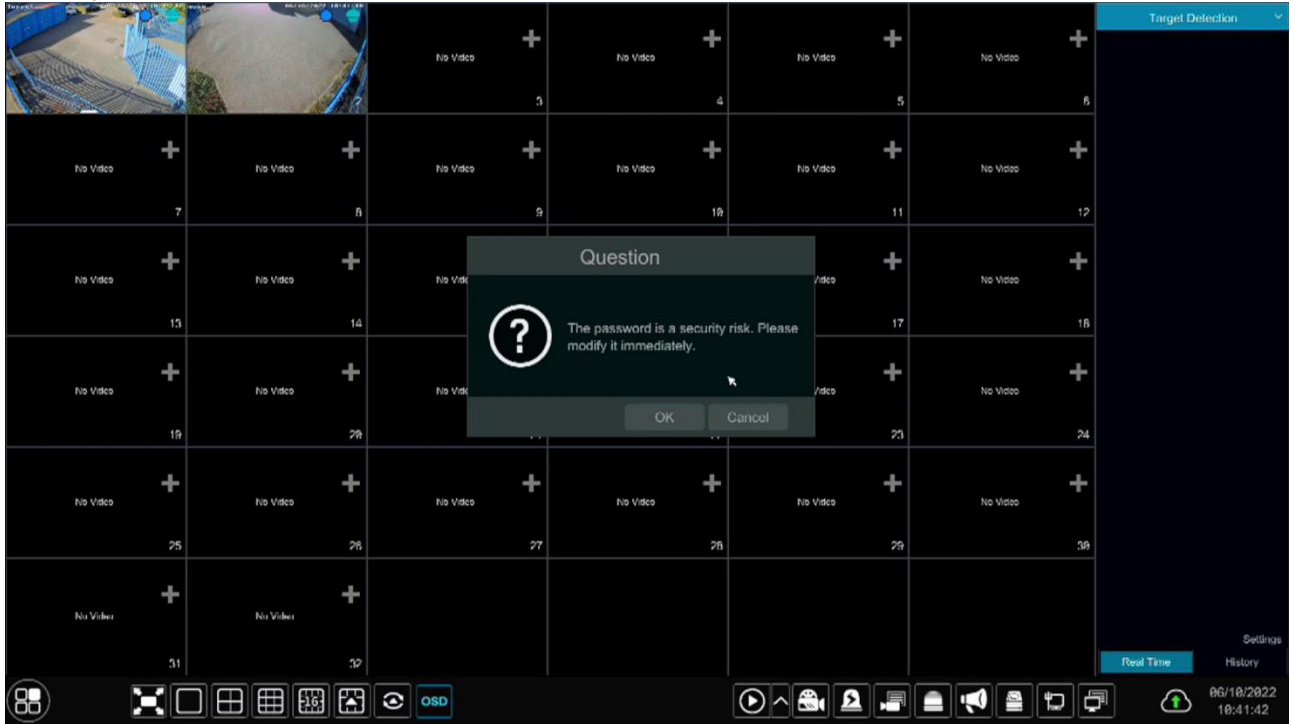

19. You should now have the system and cameras setup and recording with out issue. If you are having issue with App configuration, please review the appropriate Quick Reference Guide

<p>Qvis Lighting & Security Ltd. Telephone: +44 (0)2393 870050</p>	<p>Page 8 of 8 Issued By: Technical Dept</p>
<p>Approved By:</p>	<p>Date:11/03/2024</p>