

PRODUCT:	VIPER-Super live Plus
ITEM CODE:	


Introduction

This guide has been formulated to assist with the recorder network settings.


Initial Device Set-Up

Connect Cat5 Network cable between LAN port on recorder and available LAN port on router.

1. Log in and go to settings bottom left

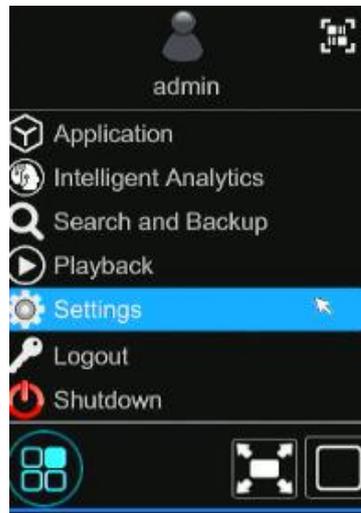

2. Select TCP/IP under Network settings

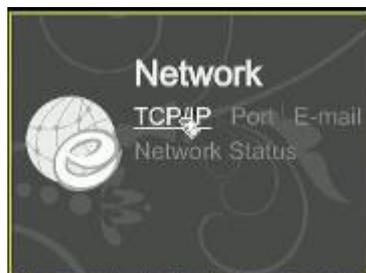

PureTech Electrical Products Ltd. Telephone: +44 (0)2392 488300	Page 1 of 3 Issued By: Technical Dept
Approved By:	Date:04/03/2024

3. Tick "Obtain IP Address Automatically". The three field which show greyed out information once this is working.

IP Address Settings

Ethernet Port 1 (Online) Internal Ethernet Port (Online)

Obtain an IP address automatically

IPv4

Address 192 . 168 . 1 . 74

Subnet Mask 255 . 255 . 255 . 0

Gateway 192 . 168 . 1 . 254

4. Please untick "Obtain DNS Automatically" and enter:

Preferred: Same number as the gateway

Alternate: 8.8.8.8

Click Apply at bottom right

Obtain DNS automatically

Preferred DNS 192 . 168 . 1 . 254

Alternate DNS 8 . 8 . 8 . 8


5. Navigate to NAT

UPnP 802.1x NAT FTP


Tick the enable box and ensure status shows "Success"

PureTech Electrical Products Ltd. Telephone: +44 (0)2392 488300	Page 2 of 3 Issued By: Technical Dept
Approved By:	Date:04/03/2024

6. Download Super live Plus from App Store or Play Store

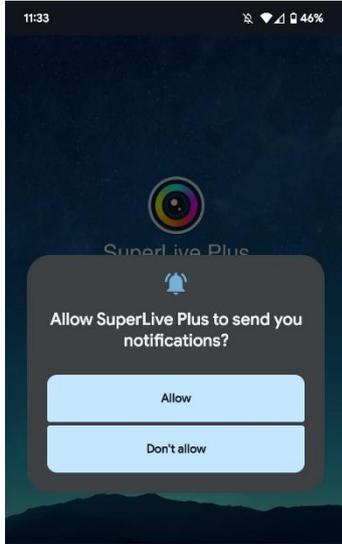

Click allow to enable notifications

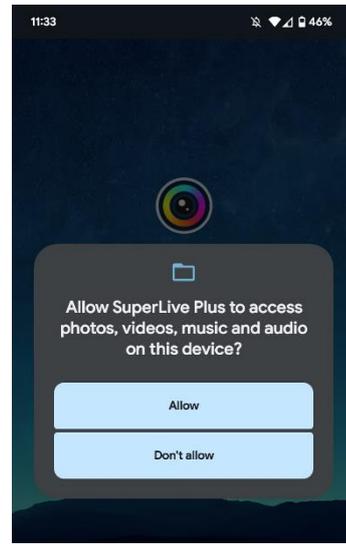

Click allow to enable saving video to phone





Share your devices

Your account allows you to share video channels with whoever you want, you can remove the share whenever you want



Click Start

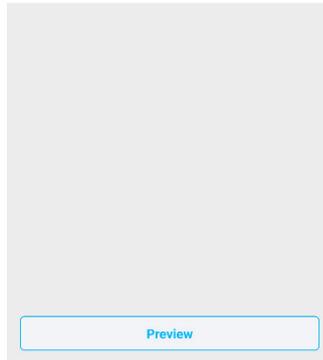

Enter serial number (found on NAT page, give device a name and enter the user name and password used to login to unit. Press preview to show video

PureTech Electrical Products Ltd. Telephone: +44 (0)2392 488300	Page 3 of 3 Issued By: Technical Dept
Approved By:	Date:04/03/2024